



A



Selectronic Premier thermostatic showers offer the highest level of temperature accuracy. PLUS models also feature a longer riser rail with 250Kg* grab rail duty and a 2 metre shower hose, ideal for specification to assist seated showering in high care applications.


Key Features

- Highly accurate, temperature control to $\pm 0.5^{\circ}\text{C}$ for a safe and comfortable showering experience
- Push button controls with audible adjustment confirmation for ease of operation
- Large LED digital temperature display
- Phased shutdown safety protection for next user cool start up and scale protection
- 3 maximum temperature limiter lock options (40°C), (41°C), (43°C) or unlocked ($25 - 46^{\circ}\text{C}$) set at installation
- Simple push button rapid commissioning
- Data logger for user and performance analysis
- Right hand side multi-entry connection options
- 5 spray mode shower head with easy rub-clean nozzles
- 250kg* load bearing grab riser rail with reinforced 4-point fixing brackets (*subject to correct wall material fixing use)
- 2mtr anti-kink flexible shower hose, adjustable handset clamp, soap dish and shower hose retaining ring

Product Range

Item Code:	Model No:	Description	kW
100085	RSELP85P	Selectronic Premier PLUS	8.5
100092	RSELP95P	Selectronic Premier PLUS	9.5
100108	RSELP108P	Selectronic Premier PLUS	10.8

Dimensions

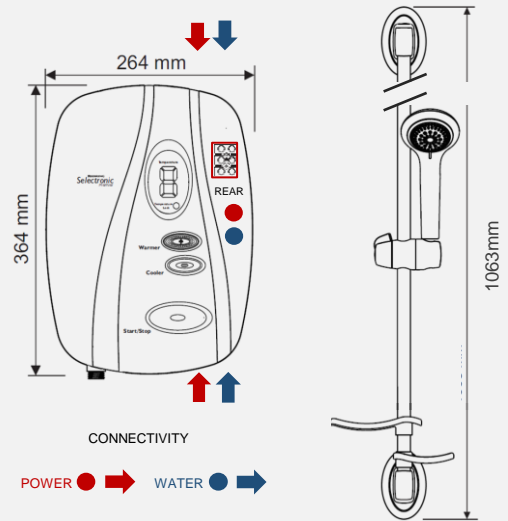

Technical Details

Model	RSELP85P	RSELP95P	RSELP108P
Item Code	100085	100092	100108
EAN /Bar Code No.	5011139100085	5011139100092	5011139100108
Output (kW)	8.5	9.5	10.8
Current Rating (Amps)	36	40	45
Energy Rating (Class)	A	A	A
Energy Rating (%)	37	37	37
Consumption (kWh/A)	495	488	489
Load Profile	XS	XS	XS
Sound (dB)	15	15	15
Running Pressure psi (bar)	10 (0.7) - 140 (10)		
Temp. Control Accuracy	$\pm 0.5^{\circ}\text{C}$		
Start-up Temperatures	40, 41 or 43°C		
Temperature Range	25 - 46°C		
IP Rating	IPX5		
Approvals / Mark	BEAB, BEAB CARE, WRAS, RNIB & CE		
UK Warranty (years)	5*		
Box dimensions (mm)	1005 x 285 x 130		
Gross weight (kg)	5.1		
Net weight (kg)	4.2		
Full pallet quantity	30		
Showers per layer	3		



*Subject to product registration within 30 days.



Tried and Tested